

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 185 013 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.03.2002 Bulletin 2002/10

(51) Int Cl.7: **H04J 3/06**, **G06F 1/12**,  
**G06F 5/06**

(21) Application number: **01117607.0**

(22) Date of filing: **23.07.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Spence, Steven Donald**  
**Mount Waverly, 3149 (AU)**  
• **Nikolov, Nikolai**  
**Elsternwick, Victoria 3185 (AU)**  
• **Ladyzhenski, Rudolf**  
**Oakleigh East 3163, Melbourne, Victoria (AU)**

(30) Priority: **24.07.2000 AU PQ896300**

(71) Applicant: **NEC CORPORATION**  
**Tokyo (JP)**


(74) Representative: **VOSSIUS & PARTNER**  
**Siebertstrasse 4**  
**81675 München (DE)**

(54) **System and method for clock synchronization for usb sink device**

(57) In a method for adaptive synchronization of a data sink device (6) to a data source device (6) coupled by a USB (4), data is received and stored in a buffer (8) of the sink device at an average data rate representative of the data rate of the source device. A data level for the

buffer is determined based on input packet size and output packet size. An accumulated data level for the buffer is compared with a threshold level. A clock frequency for the sink device is corrected when the accumulated data level exceeds the threshold level.

**Fig. 1**

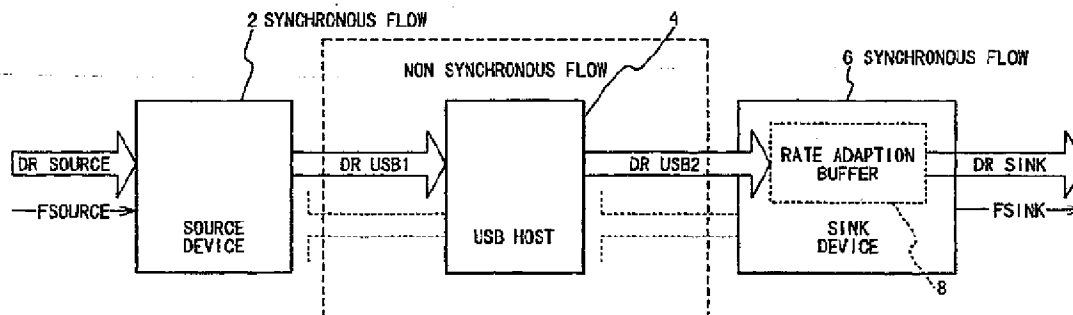

**EP 1 185 013 A2**

## Description

[0001] The present invention relates to clock synchronization methods and system for executing such methods. In particular, the present invention relates to a method for using an isochronous or time dependant endpoint to adaptively synchronize the output clock rate of a Universal Serial Bus (USB) data sink to a USB data source input clock rate, without using feed back techniques, feed forward techniques or additional clock signals.

[0002] In a synchronous communication system having a data source and a data sink, the data output from a data sink is expected to be synchronous with the data input to a data source. When the data source and the data sink are connected using a USB, the data input clock is not synchronous with a USB clock. Therefore, the USB clock does not allow the data output to be synchronized to the data input, even if the data output clock is synchronized to the USB clock. The difference between the input and output clocks leads to a frequency mismatch and subsequent data corruption.

[0003] Some systems, which do not require a high degree of data accuracy, can tolerate such frequency mismatch and data corruption. Typical low cost audio applications using a non-synchronized USB audio source (e.g. CD) and USB audio sink (e.g. speakers) are not significantly degraded audibly if audio samples are discarded or inserted to accommodate clock mismatch.

[0004] However, for real-time ISDN applications such as video, data loss due to clock frequency mismatch noticeably affects the quality of the service. The mismatch produces effects such as picture freezing and is much less tolerable.

[0005] Techniques that can perform clock synchronization between the data input clock and the USB clock have limited application due to the fact that they can only synchronize the USB clock to a limited degree of accuracy. For an application involving a mobile phone using a USB interface to access synchronous services via an ISDN interface, one possible synchronization option is a method referred to as clock mastering for asynchronous source device and synchronous sink device. This method involves the source device influencing a USB host's SOF (Start Of Frame) generation, so that isochronous data transfer is synchronized to the source device. The host SOF rate (1mS) is adjusted to track the mobile phone's data frame rate (10mS). An ISDN interface is a USB synchronous sink device, i.e., locked to the SOF clock, and the frame transfer from the mobile phone to the ISDN interface is synchronized. The ISDN clock, i.e., 1.430 192 KHz bit clock is synchronized to the SOF clock. The SOF adjustment resolution is 1/12000-bit times, where a bit period is one 12 MHz clock cycle or 83 ppm (parts per million).

[0006] Due to this coarse clock resolution, the source device is not able to select a single optimum SOF period. The source device clock of a mobile phone is locked to the mobile network and is very accurate with the result that the frequency error may approach 83 ppm. As this would still cause frame drift, the source device needs to continuously switch the SOF bit period up and down to achieve a synchronized average SOF period. The sink device must then track the average of the SOF period, as a step of 83 ppm is not acceptable. The 1.430 interface imposes a clock accuracy requirement better than  $\pm 100$  ppm, and clock jitter must be significantly less. To overcome this problem, it is necessary to integrate the frequency change with a period greater than the correction rate, so that the applied sink device frequency correction is much more stable. An error of 83 ppm causes an 1.430 frame slip approximately every 3 seconds, so that a correction rate of 3 Hz and an integration period of 3 seconds are a possible solution.

[0007] Whilst clock mastering is feasible, it is less than desirable due to the coarse clock adjustment and the limitation that only one device may act as clock master. In a number of applications, this synchronization method cannot be used.

[0008] Therefore, an object of the present invention is to provide a clock synchronizing system and method, which involves an asynchronous source device and adaptive sink device, and allows implicit feed forward clock recovery.

[0009] Another object of the present invention is to provide a clock synchronizing system and method that ameliorates or overcomes one or more disadvantages of known synchronization methods and systems.

[0010] With this in mind, one aspect of the present invention provides a method for adaptive synchronization of a data sink device to a data source device coupled by a USB, the method is attained by receiving data for a buffer of the sink device at an average data rate representative of the data rate of the source device; by determining a data level for the buffer based on input packet size and output packet size; by comparing an accumulated data level for the buffer with a threshold level; and by correcting a clock frequency for the sink device when the accumulated data level exceeds the threshold level.

[0011] Preferably, the correcting step involves correcting the frequency by an amount equal to a constant K divided by the time required for the accumulated data level to drift from a reference level to the threshold level.

[0012] The method may further include the step of inhibiting the comparing and correcting step for a predetermined period after the correcting step. The predetermined period may be between three or five times the drift time. Preferably the predetermined period is reduced if the data level traverses the reference level or exceeds twice the threshold level.

[0013] The reference level is preferably the data level measured over a first measurement period. The comparing step may be executed periodically.

[0014] The threshold level is preferably set to be greater than three times a maximum data level jitter. Preferably the size of the buffer is set to be greater than three times the threshold level.

[0015] Another aspect of the present invention provides a system for adaptive synchronization of a data sink device to a data source device. The system includes a source device; and a sink device coupled to the source device by a USB. The sink device includes a circuitry for implementing a buffer for storing received data from the source device and executing the above-described method.

[0016] Yet another aspect of the present invention provides a sink device for receiving data from a USB-coupled source device. The sink device includes a circuitry for implementing a buffer for storing received data from the source device and executing the above-described method.

[0017] The present invention will be described with reference to the accompanying drawings, wherein:

Fig. 1 is a block diagram of an embodiment of a data transfer system executing an adaptive clock synchronization method;

Fig. 2 is a graphical representation of the level of data in a sink device of the system shown in Fig. 1 against time; and

Fig. 3 is a graphical representation of the average sink device data level in the sink device of the system shown in Figure 1 against time.

[0018] Referring now to Fig. 1, there is generally shown a data transfer system 1, which executes adaptive clock synchronization for data passed from a source device 2 to a sink device 6 using a USB, and a USB host 4 that executes a USB host application. The USB host 4 may be a PC with at least one USB port. The source device 2 may be a mobile telephone, and the sink device 6 may be a computer with a video card or an interface to an ISDN, as described below.

[0019] The source device has a synchronous data flow rate referenced  $DR_{source}$ , and a source device frequency referenced  $F_{source}$ . The source device-to-USB host average data flow rate is referenced  $DR_{usb1}$ , and the USB host-to-sink device average data flow rate is referenced  $DR_{usb2}$ . The host application preserves the data flow rate from the source device connection to the sink device connection such that  $DR_{usb1} = DR_{usb2} = DR_{usb}$ . The sink device data flow rate is denoted as  $DR_{sink}$  and the sink device frequency is denoted as  $F_{sink}$ . The sink device 6 includes a rate adaptation buffer 6 which has an input stream received at the rate  $DR_{usb2}$  and an output stream sent at the rate  $DR_{sink}$ .

[0020] The sink device 6 includes circuit components to implement the buffer 6 and execute the synchronization method. For instance, the components may include a microprocessor and associated control software defining the synchronization method. The techniques used to configure the buffer 6 are known, and would be readily apparent to those skilled in the art.

[0021] The adaptive clock synchronization method, as described in detail below, operates by adjusting the sink device data rate  $DR_{sink}$  to match the USB data delivery rate  $DR_{usb}$  by controlling the sink device clock frequency  $F_{sink}$ . This results in synchronization of the sink device 6 with the source device 2 as the source device data flow rate  $DR_{source}$  is implicit in the USB data delivery rate  $DR_{usb}$  when averaged over time.

[0022] The difference between the input and output data streams of the rate adaptation buffer 6 are detected by comparing the sink device data level 12 with two threshold levels, i.e., plus and minus threshold levels. The data level 12 is a difference between the input flow and the output flow. The data level 12 is checked periodically by the sink device 6. As can be seen in Fig. 3, if the threshold is exceeded, a frequency correction is determined based on the inverse of the time ( $T_{drift}$ ) taken for the data level 12 to drift from a reference level to the threshold level. The correction is set approximately 20% greater than necessary to ensure that the drift is reversed and the frequency asymptotes towards the source device frequency. Re-correction is inhibited for a period of 5 times the drift period ( $T_{drift}$ ) or terminated early, if the data level 12 crosses the reference level or 2 times the threshold level. These checks cater for error conditions should they arise. The reference level is determined when data transfer commences.

[0023] The flow rate matching process realises a frequency matching ( $F_{source}$  to  $F_{sink}$ ) to better than 100 ppm and typically better than 10 ppm. This meets the requirements of BRI ISDN. Thus, an elimination of data overrun or underrun, which occurs when the source device data rate and the sink device data rate are not matched.

[0024] Fig. 2 illustrates how the data level 12 of data held in the rate adaptation buffer 6 of the sink device 6 varies over time. In this example, data is shown to arrive in small roughly constant packet sizes ( $P_i$ ) and is extracted at a fixed rate with a larger packet size ( $P_o$ ). The average data level 14 is an important factor for determining flow imbalance. The increase of the data level 12 is greatly exaggerated for the purposes of this description. For an ISDN interface, a rate difference of 50 ppm will cause the data level 12 to change by 1 byte over about 1 second.

[0025] A typical behavior of the average data transfer level 14 is shown in Fig. 3. Two clock correction points 9 and 10 are shown. The rate of drift is slowed at each correction. The overshoot shown at the correction points occurs due to the correction being applied gradually.

[0026] To execute the clock synchronization method, the system 1 shown in Fig. 1 includes the following characteristics:

- (1) A data source device with a synchronous data flow rate,  $DR_{source}$ .

(2)  $DR_{usb} = DR_{source}$ , when measured over a sufficiently long period, to average out a transport jitter.

(3) All source device data are transferred to the USB host 4. This may involve data repacketization and data packets ( $P_i$ ) with different size, but constant in time, between the USB frames.

(4) A USB transport rate that is greater than the source device data rate. The source device data delivery rate,  $DR_{usb}$  is not the same as the USB transport rate. The rate  $DR_{usb}$  is the rate at which the USB system transports data provided by the source device.

(5) A host application which preserves the data flow rate from the source device connection to the sink device connection, such that  $DR_{usb1} = DR_{usb2} = DR_{usb}$ , as described above. Fig. 1 shows the source device 2 and sink device 6 both connected to the USB host 4 by a USB. However, in its simplest form, all that are required are the sink device 6 to receive data at a data delivery rate  $DR_{usb2}$  that implies the source device rate  $DR_{source}$ .

[0027] The USB system introduces data transfer jitter, i.e., packet size ( $P_i$ ) variation due to the phase shift between the source device clock, (not shown) and the USB clock (not shown). Consequently, packet size ( $P_o$ ) variation is outputted. The adaptive synchronization method takes this into account, by buffering the data transfer and checking only for long term accumulation or depletion of data, passing through the sink device 6, to determine data rate imbalance.

[0028] The variation over time of the data level 12 shown in Fig. 2 is a result of the combined effect of the following factors:

- $F_{sink}$  to  $F_{source}$  differences at start up, i.e., prior to clock correction;
- USB transport jitter; and
- Sink frequency jitter arising from the synchronization method.

[0029] As long as the rate adaptation buffer 6 is large enough to accommodate the fluctuation, i.e., does not overflow or underflow, the synchronous output data flow from the sink device 6 can be maintained uninterrupted. Balanced data flow requires the quantity of input data minus the quantity of output data to remain constant over time, such that:

- if the data level 12 increases then  $F_{source} > F_{sink}$  and  $F_{sink}$  must be increased; and
- if the data level 12 decreases then  $F_{sink} > F_{source}$  and  $F_{sink}$  must be decreased.

[0030] Data flow balance in the reverse direction occurs simultaneously as a result of synchronization between transmission and reception clocks in both the source device 2 and the sink device 6.

[0031] As shown in Fig. 2, the data level 12 changes constantly. In order to determine if there is a flow imbalance and hence a clock frequency difference, it is necessary to determine a trend in the changes of the data level 12. This is carried out by accumulating the data level changes, i.e., the sum of the data input flow minus the data output flow. The data input flow is the total size of the packets received by the buffer 6 and the data output flow is the total size of the packets outputted from the buffer 6.

[0032] The Accumulated Data Level (ADL) over a period of time ( $\Delta T$ ) is represented mathematically as:

$$ADL = \text{Reference\_level} + \sum_0^{\Delta T} (\text{Data\_input} - \text{Data\_output}) \quad (1)$$

i.e.,

$$ADL = \text{Reference\_level} + \Delta DL$$

where

*Reference\_level*: is the reference (or initial) data level;

*Data\_input*: is the data input flow, being  $\sum P_i$  wherein  $P_i$  is input packet size;

*Data\_output*: is the data output flow, being  $\sum P_o$  wherein  $P_o$  is output packetize; and

$\Delta DL$ : is the accumulated data level change.

[0033] Only changes in the accumulated data level 12 are of interest for clock correction, because the reference

data level is constant.

[0034] The accumulated data level ( $\Delta DL$ ) varies due to:

- (1) The frequency difference between the source device and sink device; and
- (2) Transport jitter due to the discrete nature of data inflow and outflow.

Thus the change in the Accumulated Data level can also be defined as,

$$\Delta DL = \Sigma (Freq\_difference\_level\_drift + packet\_del/extr\_jitter) \quad (2)$$

where

*Freq\_difference\_level\_drift*: is the data level change; and

*Packet\_del/extr\_jitter*: is the jitter due to the source device data flow and the sink device data flow.

[0035] The second factor, the jitter, causes an error in the measurement of the data level 12 and in the calculation of the frequency correction required to achieve balance. To minimize the jitter influence, the USB data transfer packet size should be kept as small as possible, and the data level measurement should be synchronized to the source device interface or sink device interface which delivers/retrieves data to/from the interface with greater packet size ( $P_i$  or  $P_o$ ).

[0036] The adaptive clock synchronization method will now be described with reference to the USB sink device 6 being a BRI ISDN adaptor or interface and the USB source device 2 being a mobile phone. The mobile phone receives input data such as a video data in 10 mS frames (80 bytes of data). When the received data is transported over the USB host 4 as source device data, the data frame is spread over nine 1 mS isochronous USB frames (nominally 11 byte frames), not shown, and read by the sink device as 10 mS frames (80 bytes). The data level measurement is synchronized to the data retrieval at the sink device, resulting in a jitter of 11 bytes (a USB source device packet). If the data level measurement is not synchronized, the potential jitter is 91 bytes (a USB source device packet + a sink device packet), which is highly unacceptable.

[0037] The first factor causing variations in the accumulated data level ( $\Delta DL$ ) is due to the source device - sink device frequency difference as mentioned earlier. The relationship of the *Freq\_difference\_level\_drift* (data level change) to the frequency difference is derived as follows:

$$\Delta DL \propto F_{source} - F_{sink}$$

$$\Delta DL = K \times \int_0^{\Delta T} (F_{source} - F_{sink}) dt$$

$$\Delta DL = K \times \Delta T \times (F_{source} - F_{sink}) \quad (3)$$

where

$\Delta T$ : is the measurement period, and

$K$ : is a system design constant.

[0038] A frequency correction value ( $F_{corr}$ ) is equal to the frequency difference between the source device frequency and the sink device frequency ( $F_{source} - F_{sink}$ ), and is determined by rearranging Equation (3), by setting the data level 12 to a suitable error detection threshold and by setting  $\Delta T$  to the time for the data level 12 to drift from the reference level to the positive or negative threshold level, as shown in Fig. 3, such as:

$$F_{corr} = Threshold\_level / (K \times T_{drift}) \quad (4)$$

[0039] The frequency correction value is therefore determined by measuring the time taken for the data level to shift

from the reference level to a threshold level. The key factor in doing this is to accurately determine the data level and its change. As an example, the method and an appropriate set of parameters for a given USB stream and an ISDN interface are described below.

**[0040]** The threshold level is the level which represents a significant/detectable change of the average buffer level. This level should preferably be:

- (1) as low as possible to minimise the rate adaptation buffer size; and
- (2) as high as possible to reduce the impact of jitter error on frequency correction accuracy.

**[0041]** Jitter may cause the threshold level to be exceeded earlier and the frequency correction value to be incorrectly calculated. A small  $T_{drift}$  measure produces an overcorrection, as the correction factor is inversely proportional, as shown in Equation (4). This is acceptable as long as the flow drift is reversed and the magnitude of the frequency error reduced, so that successive corrections asymptote the error to zero. The level of overcorrection only impacts on the rate of convergence of the frequency error and does not affect data transfer quality. Hence, a maximum overcorrection due to jitter of 50% is recommended. This is comfortably below the 100% limit over which the sink device frequency will diverge from the source device frequency.

**[0042]** The threshold level is determined and set so that jitter does not cause an over-correction greater than 50%. The threshold level is determined from Equation (4) as follows:

$$F_{corr} = \text{Threshold\_level} / (K \times T_{drift}) \text{ without jitter}$$

$$F_{corr\_j} = \text{Threshold\_level} / (K \times T_{drift\_j}) \text{ with jitter}$$

For a 50% overcorrection, i.e.  $F_{corr\_j} / F_{corr} = 1.5$  Then  $T_{drift} / T_{drift\_j} = 1.5$  or  $T_{drift\_j} = 2/3 T_{drift}$

**[0043]** This occurs when the jitter level is 30% of the threshold level. Hence, the threshold level must be at least 3 times the jitter level.

**[0044]** The data level is periodically compared with the threshold level at each monitoring period to minimize processing requirements.

**[0045]** In the case of the ISDN example, the USB packet size is nominally 11 bytes, the maximum jitter error is 11 bytes, the threshold level =  $3 \times 11 = 33$  bytes, and the monitoring period = 1 second.

**[0046]** The data level change due to a maximum frequency error of 100 ppm over 1 second = 1.25 bytes based on Equation (5). The correction response is not effected by a one second monitoring period.

**[0047]** Clock correction is undertaken when the accumulated data level change ( $\Delta DL$ ) becomes equal or exceeds the threshold level in absolute terms. A frequency correction value  $F_{corr}$  is determined, the sink device clock  $F_{sink}$  is adjusted by  $F_{corr}$  and further correction is inhibited for a period to allow the data level to asymptote back towards the reference level.

**[0048]** The correction value  $F_{corr}$  is increased by 20% over that which is derived from Equation (4) to accommodate calculation error and ensure that the flow imbalance is reversed. The over-correction factor is implementation dependent. It must exceed any calculation error resulting from the implementation but should not exceed 100% minus the over-correction which results due to data level jitter. The synchronization method asymptotes the sink device frequency  $F_{sink}$  to a value, which slowly hunts between a slightly high frequency and slightly low frequency about the actual source device frequency  $F_{source}$ . This is also carried out to accommodate the limitations in clock setting resolution. The method operates through the use of the  $\pm$  threshold levels and a minimum correction value. For the ISDN example, the minimum adjustment is  $\pm 1$  ppm. The maximum correction is also limited to  $\pm 100$  ppm to comply with I.430 requirements.

**[0049]** The sink device clock frequency adjustment rate is limited to provide an acceptable output clock jitter. In the ISDN case example, the adjustment rate is restricted to 1 ppm per 10 mS.

**[0050]** The correction inhibit period is employed to give time for the correction to take effect. This correction inhibit period is required because of the following:

- (a) jitter will cause the data level value to recross the threshold until the average data level falls below the threshold minus the maximum jitter;
- (b) the limited clock adjustment rate may cause the data level to increase further before the full correction takes place; and
- (c) the flow imbalance, though reversed by the correction, is reduced in magnitude and may require considerable time for the data level to reduce from the threshold level to the reference level.

[0051] The inhibit period is set to between 3x and 5x  $T_{drift}$  and terminated immediately if the reference level or twice the threshold level is crossed. The factor of 5 results from the frequency correction being nominally overcorrected by 20%. Thus, the time for the data level to reduce back to the reference level is  $T_{drift}/0.2$ . The factor may be as low as 3x, as this will still ensure that the data level has decreased to a level less than 1/2 the threshold and jitter will not cause false re-correction. The termination conditions are included to accommodate the additional overcorrection due to jitter and further change of the source device frequency  $F_{source\ device}$ .

[0052] The system design constant  $K$  in Equation (3) is determined by setting  $\Delta T$ ,  $(F_{source} - F_{sink})$  and  $\Delta DL$  to known values for the application. For example, a 64 Kbps data stream, 1 byte of data is transmitted every 125  $\mu$ S. If the frequency error  $(F_{source} - F_{sink})$  is 1 ppm, the data level will increase by 1 byte in 125  $\mu$ S/ $10^{-6}$  = 125 seconds. So, by setting  $\Delta T = 125$  in Equation 3 then,

$$\begin{aligned} K &= \Delta DL / (\Delta T \times (F_{source} - F_{sink})) \\ &= 1 / (125 \times 1) \\ &= 1/125 \text{ s}^{-1} \text{ ppm}^{-1} \end{aligned}$$

[0053] Substituting for  $K$ , equation (4) becomes:

$$F_{corr} = 125 \times \text{Threshold}/T_{drift} \quad \text{ppm} \quad (5)$$

where  $T_{drift}$  has units of seconds.

[0054] For the ISDN example, the sink device clock is implemented as a Voltage Controlled Oscillator (VCO) controlled by a Digital to Analogue Converter (DAC) output from a microprocessor that monitors the rate adaptation buffer and executes the synchronization method of the present invention to determine  $F_{corr}$ . The VCO has a  $\pm 2$ V input range to adjust the frequency  $\pm 100$  ppm. So, for a 5V DAC range, 1 bit adjusts the frequency 0.98 ppm. Including the 20% overcorrection, the constant  $K$  becomes 153.6 (= 125 x 1.2 / 0.98) and the DAC output correction value ( $DAC_{out}$ )

$$DAC_{out} = 153.6 \times \text{Threshold}/T_{drift} \quad \text{bits/ppm}$$

[0055] Many modifications will be apparent to those skilled in the art without departing from the scope of the present invention as hereinbefore described with reference to the accompanying drawings.

## Claims

1. A method of adaptive synchronization of a data sink device to a data source device coupled by a USB, including the steps of:

receiving data at a buffer of said sink device at an average data rate representative of the data rate of said source device;  
determining a data level for said buffer based on input packet size and output packet size;  
comparing an accumulated data level for said buffer with a threshold level; and  
correcting a clock frequency for said sink device when said accumulated data level exceeds said threshold level.

2. A method according to claim 1, wherein said correcting step includes correcting the frequency by an amount equal to a constant  $K$  divided by the time required for the accumulated data level to drift from a reference level to the threshold level.

3. A method according to either one of claims 1 or 2, wherein the method includes a further step of inhibiting said comparing and correcting step for a predetermined period after said correcting step.

4. A method according to claim 3, wherein the predetermined period is between three or five times said drift time.

5. A method according to either one of claims 3 or 4, wherein said determined period is reduced if said data level traverses said reference level or exceeds twice the threshold level.

6. A method according to any one of claims 2 to 5, wherein the reference level is the data level measured over a first measurement period.

7. A method according to any one of the preceding claims, wherein said comparing step is executed periodically.

8. A method according to any one of the preceding claims, wherein the threshold level is set to be greater than three times a maximum data level jitter.

9. A method according to any one of the preceding claims, wherein the size of the buffer is set to be greater than three times said threshold level.

10. A system for adaptive synchronization of a data sink device to a data source device, comprising:

a source device; and

a sink device coupled to said source device by a USB, the sink device including circuitry for implementing a buffer for storing received data from said source device and executing the method according to any one of claims 1 to 9.

11. A sink device for receiving data from a USB-coupled source device, the sink device including circuitry for implementing a buffer for storing received data from said source device and executing the method according to any one of claims 1 to 9.



Fig. 1

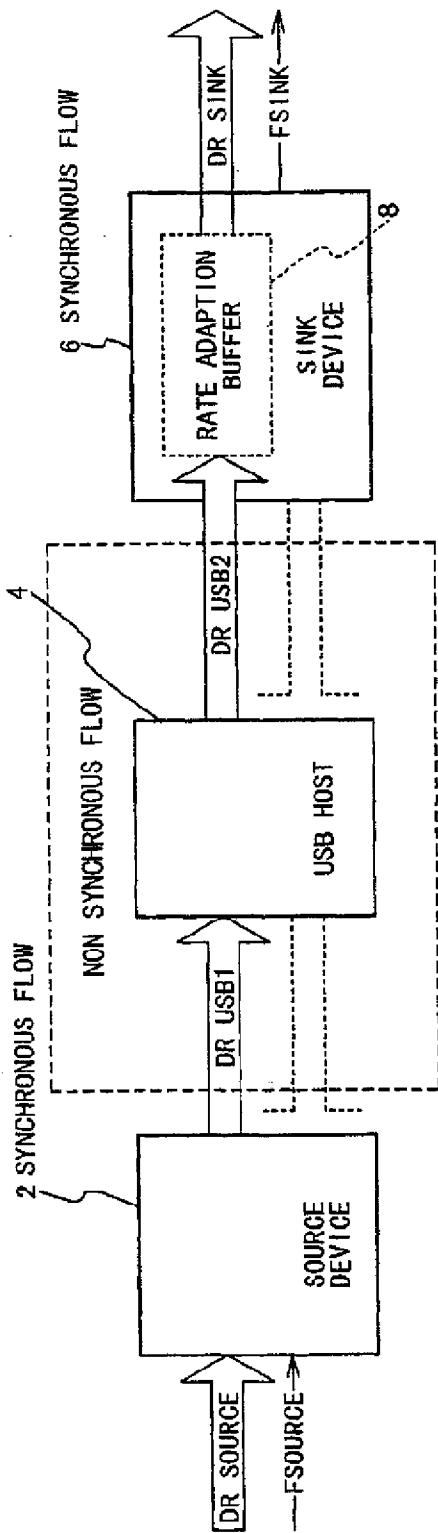


Fig. 2


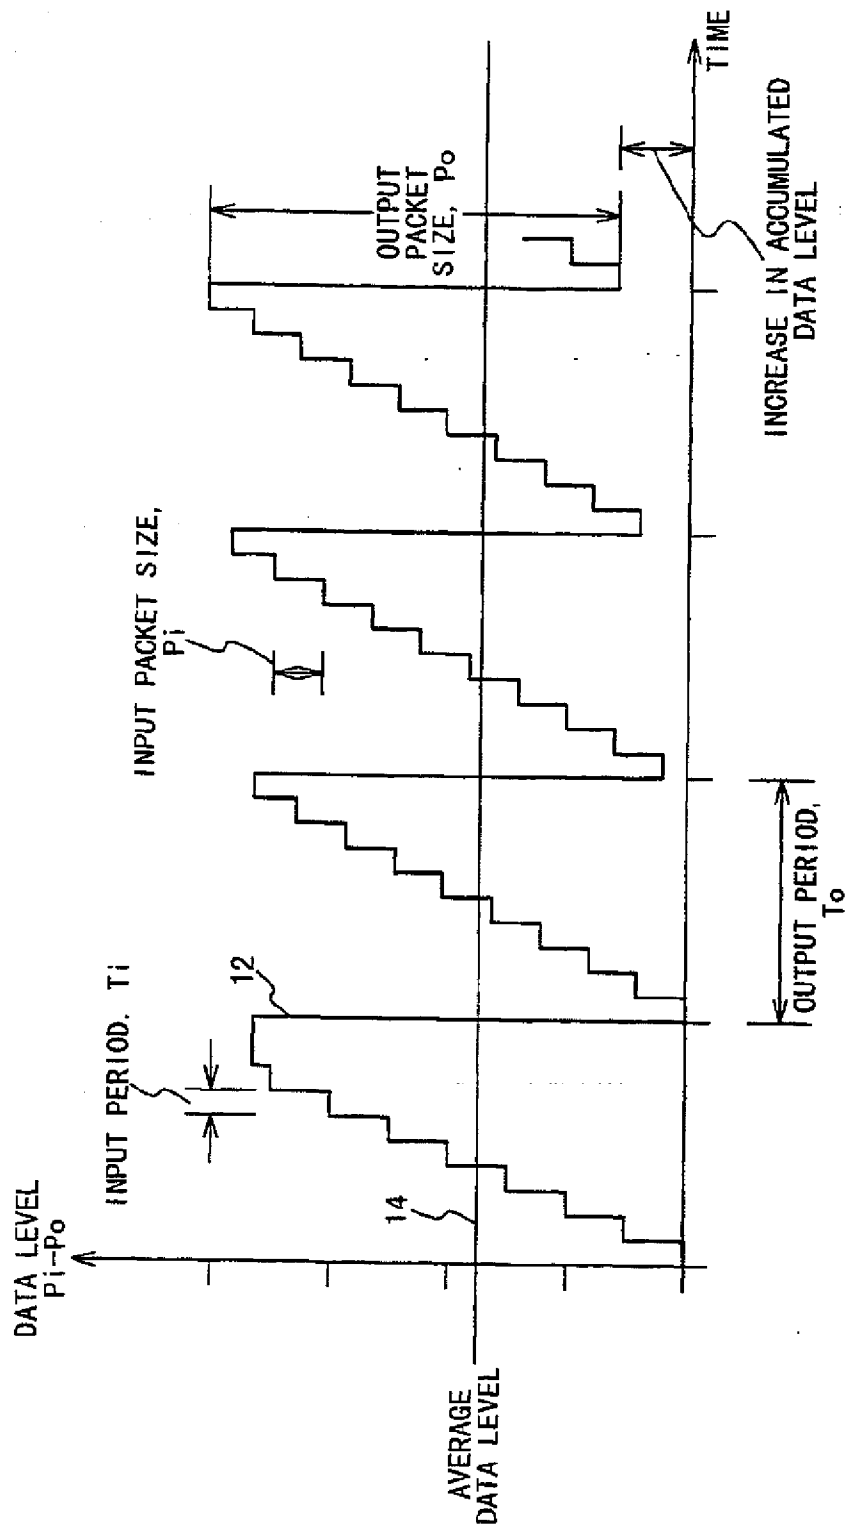


Fig. 3





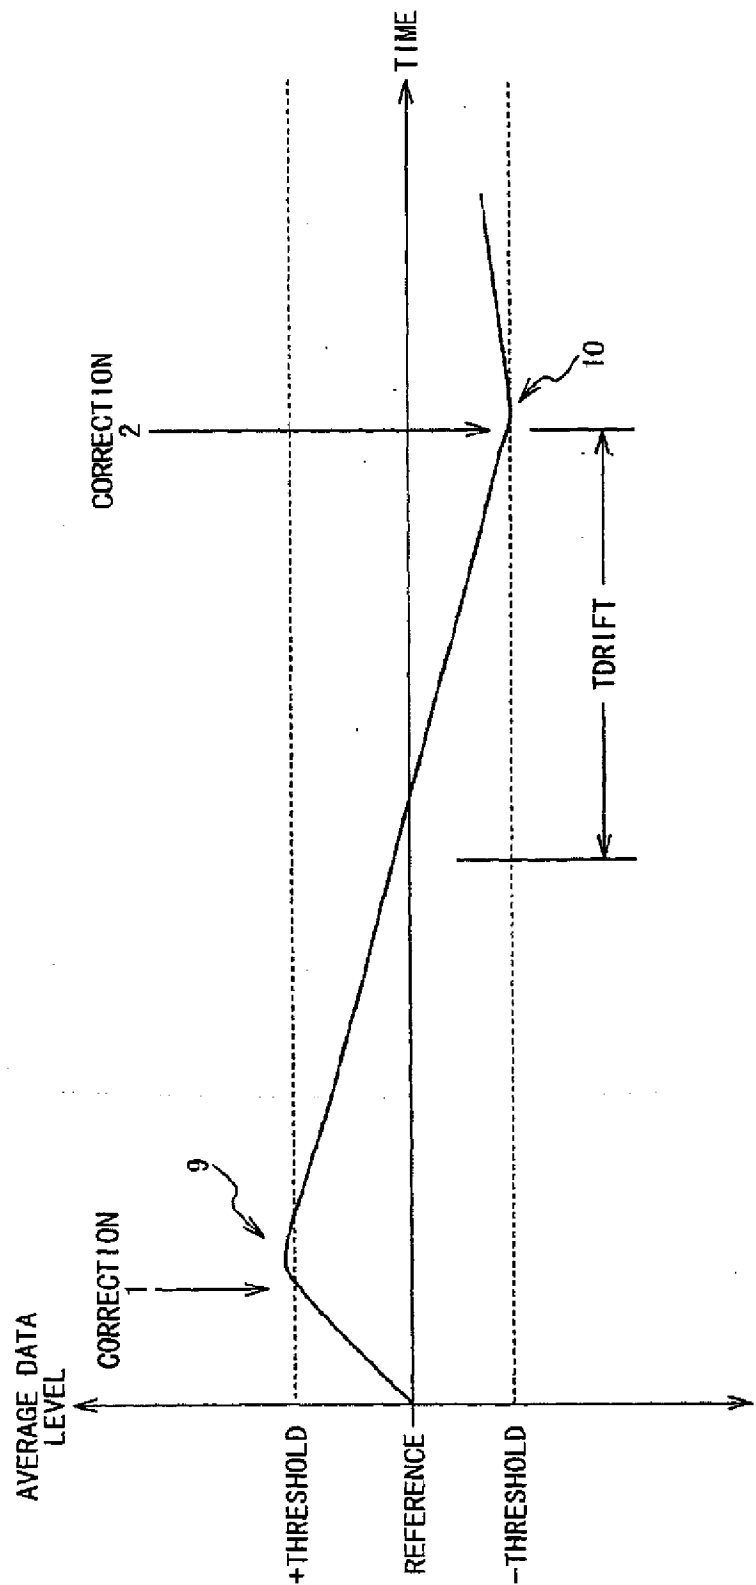

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
07.09.2005 Bulletin 2005/36

(51) Int Cl.7: **H04J 3/06**, **H04L 12/64**,  
**G06F 5/06**

(43) Date of publication A2:  
06.03.2002 Bulletin 2002/10

(21) Application number: **01117607.0**

(22) Date of filing: **23.07.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  

- **Spence, Steven Donald**  
**Mount Waverly, 3149 (AU)**
- **Nikolov, Nikolai**  
**Elsternwick, Victoria 3185 (AU)**
- **Ladyzhenski, Rudolf**  
**Oakleigh East 3163, Melbourne, Victoria (AU)**

(30) Priority: **24.07.2000 AU PG896300**

(71) Applicant: **NEC CORPORATION**  
**Tokyo (JP)**


(74) Representative: **Vossius & Partner**  
**Siebertstrasse 4**  
**81675 München (DE)**

(54) **System and method for clock synchronization for usb sink device**

(57) In a method for adaptive synchronization of a data sink device (6) to a data source device (6) coupled by a USB (4), data is received and stored in a buffer (8) of the sink device at an average data rate representative of the data rate of the source device. A data level for the

buffer is determined based on input packet size and output packet size. An accumulated data level for the buffer is compared with a threshold level. A clock frequency for the sink device is corrected when the accumulated data level exceeds the threshold level.

**Fig. 1**

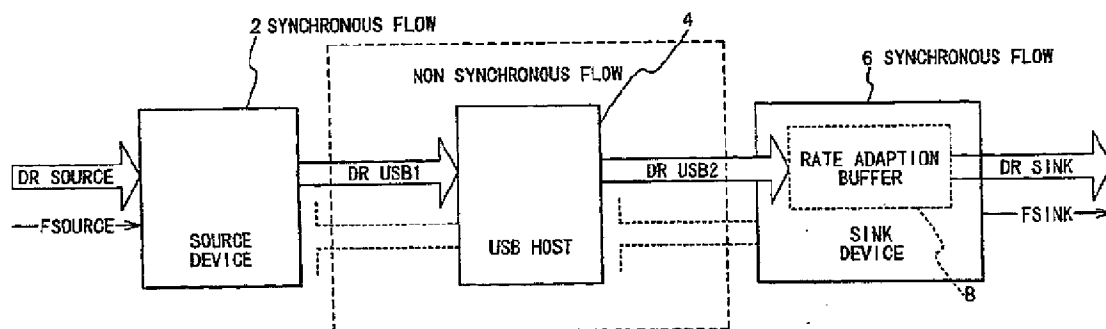



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 01 11 7607

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 658 019 A (TELEFONAKTIEBOLAGET LM ERICSSON) 14 June 1995 (1995-06-14) * abstract; claims 1,6; figures 1,2 * * page 2, line 16 - line 28 * * page 3, line 13 - line 30 * * page 3, line 38 - page 4, line 13 *	1-11	H04J3/06 H04L12/64 G06F5/06
X	WO 95/22233 A (NEWBRIDGE NETWORKS CORPORATION; BESSETTE, FRANCOIS) 17 August 1995 (1995-08-17) * abstract; claims 1-3,8-11,15; figures 2,3 * * page 1, line 3 - line 11 * * page 2, line 29 - page 3, line 23 * * page 5, line 30 - page 6, line 7 * * page 6, line 34 - page 7, line 9 *	1-11	
X	US 5 027 351 A (DE PRYCKER ET AL) 25 June 1991 (1991-06-25) * abstract; claim 1; figure 1 * * column 1, line 8 - line 17 * * column 1, line 38 - line 61 * * column 3, line 12 - line 47 * * column 4, line 30 - line 43 * * column 4, line 63 - column 5, line 60 *	1-11	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G06F H04J H04L
X	EP 0 707 398 A (KONINKLIJKE KPN N.V) 17 April 1996 (1996-04-17) * abstract; claim 1 * * column 1, line 38 - line 49 * * column 2, line 23 - line 42 *	1-11	
A	US 5 297 139 A (OKURA ET AL) 22 March 1994 (1994-03-22) * abstract; figures 2-7,9,12,13,15,16 * * column 2, line 28 - line 61 * * column 8, line 52 - column 9, line 50 *	1-11	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 12 July 2005	Examiner Wolters, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPC FORM 1503 (01.82) (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 11 7607

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-07-2005

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0658019	A	14-06-1995	SE	515201 C2	25-06-2001
			CA	2136560 A1	27-05-1995
			EP	0658019 A1	14-06-1995
			SE	9303922 A	27-05-1995
			US	5486784 A	23-01-1996
-----					
WO 9522233	A	17-08-1995	AU	1572995 A	29-08-1995
			WO	9522233 A1	17-08-1995
-----					
US 5027351	A	25-06-1991	BE	1000415 A7	22-11-1988
			AT	81741 T	15-11-1992
			AU	607475 B2	07-03-1991
			AU	1395288 A	10-10-1988
			DE	3875484 D1	26-11-1992
			DE	3875484 T2	15-04-1993
			WO	8807297 A1	22-09-1988
			EP	0365526 A1	02-05-1990
			ES	2006602 A6	01-05-1989
			FI	96470 B	15-03-1996
			JP	2502776 T	30-08-1990
-----					
EP 0707398	A	17-04-1996	NL	9401696 A	01-05-1996
			EP	0707398 A1	17-04-1996
			JP	8130544 A	21-05-1996
-----					
US 5297139	A	22-03-1994	JP	4369942 A	22-12-1992
			DE	4219918 A1	14-01-1993
-----					

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82